


- NOTES:
- 1. MAT'L USED: GARLOCK 3400 (700°F, t=.063)
  - 2.
  - 3. ALTERNATE MATLS ACCEPTABLE IF RATED FOR THE FOLLOWING OPERATING ENVIRONMENT: P= 120 psig AT 650°F.

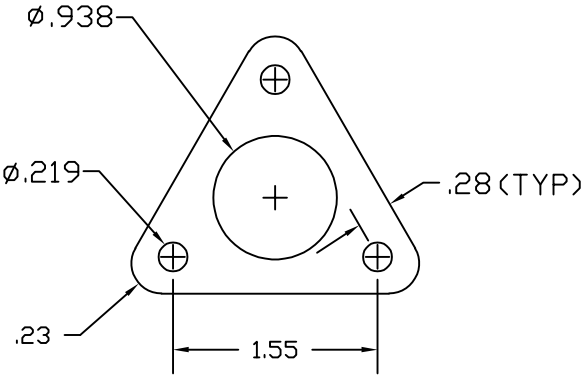

-1 GASKET  
(THICKNESS .050-.075)

SHEET	REV	DATE	DESCRIPTION	APR
1	A	03/18/86	ADDED NOTE 3 & THICKNESS CALLOUT	
1	B	04/24/86	REVISED NOTE 1: WAS A6004B CALLOUT	

QTY.	PART NUMBER	DESCRIPTION	MATERIAL	SPECIFICATION	
Paravion™ Inc. ✓Technology		TITLE GASKET-206 L SERIES HEATER		DRAWING NO. S-9502EC	
TOLERANCES EXCEPT WHERE NOTED:  .X = ± .1 .XX = ± .05 .XXX = ± .010  ANGLES = ± 1°		DRAWN BY	APRVD. BY	DATE	REVISION B
		KM	NS	02/17/92	SHEET 1 OF 1
		TMN	REB	07/23/91	
		DO NOT SCALE DRAWING			
		© 1991 PARAVION TECH., INC. PARAVION IS A TRADEMARK OF PARAVION TECHNOLOGY, INC.			